



Technology Solutions

# TEK-HYDRO 4500A-D

## Differential Pressure Level Transmitter



LEVEL



## Introduction

Tek-Hydro 4500A-D series Differential Pressure Transmitter is a commonly used instrument which measures the level of a liquid in a tank. It is a simple device used in a wide range of liquids, including corrosive, non-corrosive and abrasive liquids and slurries in tanks of any size. It can handle broad temperature and pressure ranges under different process conditions. It is a multivariable instrument which measures not only the liquid level, but also other parameters such as the flow rate and density.

## Working Principle

The device does not measure the liquid level directly, but infers it based on the liquid's hydrostatic pressure which is the pressure exerted by the liquid in the tank.

It is calculated using the following formula:

$$P_g = h \times \rho g$$

Where,

$P_g$  = Hydrostatic pressure of the liquid


$h$  = Liquid level

$\rho g$  = Specific gravity of the liquid

The liquid level is thus derived as follows:

$$h = P_g / \rho g$$

Each transmitter has two pressure ports, a high-pressure port which is connected at the base of the tank and a low-pressure port which is either connected at the top of the tank or opened to the atmosphere depending on the tank.

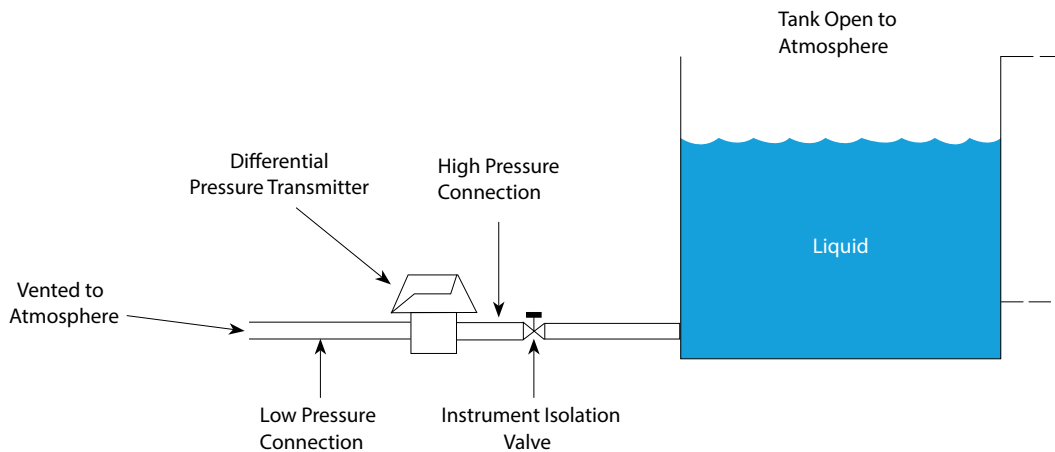

The above mentioned equation shows that the liquid level is directly proportional to the hydrostatic pressure. Therefore, as the liquid level increases, the hydrostatic pressure measured at the high-pressure port also increases.

A diaphragm which comes into direct contact with the liquid in the tank constitutes the sensing element of the transmitter. Some transmitters use remote seals in case of corrosive or abrasive liquids. A remote seal protects the sensor from the liquid and enables the pressure to be measured from a distance. It consists of a diaphragm that senses pressure and a capillary that connects to the transmitter. When the liquid in the tank exerts pressure against the remote seal diaphragm, it deflects and exerts a force on the liquid inside the capillary. This force is then transferred to the diaphragm in the transmitter, causing it to deflect. The liquid pressure is measured depending on this deflection.

### Level measurement in open tanks

In open tanks, i.e. tanks in which the liquid is not pressurized or in vacuum, the high-pressure port is connected at the base of the tank and the low-pressure port is open to the atmosphere. The atmospheric pressure acting on the surface of the liquid is cancelled out by the low-pressure port. The pressure differential is therefore the hydrostatic pressure of the liquid.

### Level measurement in closed tanks

In closed tanks, i.e. pressurized tanks or tanks that are closed to prevent vapor or gas from escaping, it is necessary to connect both pressure ports to the tank to measure the pressure acting on surface of the liquid. While the high-pressure port is connected to the base of the tank, the low-pressure port is connected to the top of the tank, and the vapor pressure is diverted to the low-pressure port by means of an impulse line. In this case, the high-pressure port measures the hydrostatic pressure plus the pressure exerted by the vapor or gas on the surface of the liquid, and the low-pressure port only measures the vapor or gas pressure. The level of the liquid is measured from the difference in the pressures measured at the two ports.

## Benefits


- Operator can calibrate device using zero/span button, no handheld calibrator required.
- Digital communication HART protocol.
- Fail-safe mode process function for detecting any abnormal condition occurred.
- High accuracy up to  $\pm 0.075\%$
- Automatic ambient temperature compensation improves performance of device.
- Various Output: 4-20mA, digital signals.
- The mounting bracket rotated up to  $360^\circ$  and LCD display up to  $270^\circ$ .
- EEPROM write protection.

## Application


- It is used in level monitoring applications.

## Dimensional Drawing


### Tek-Hydro 4500A-D-LFD

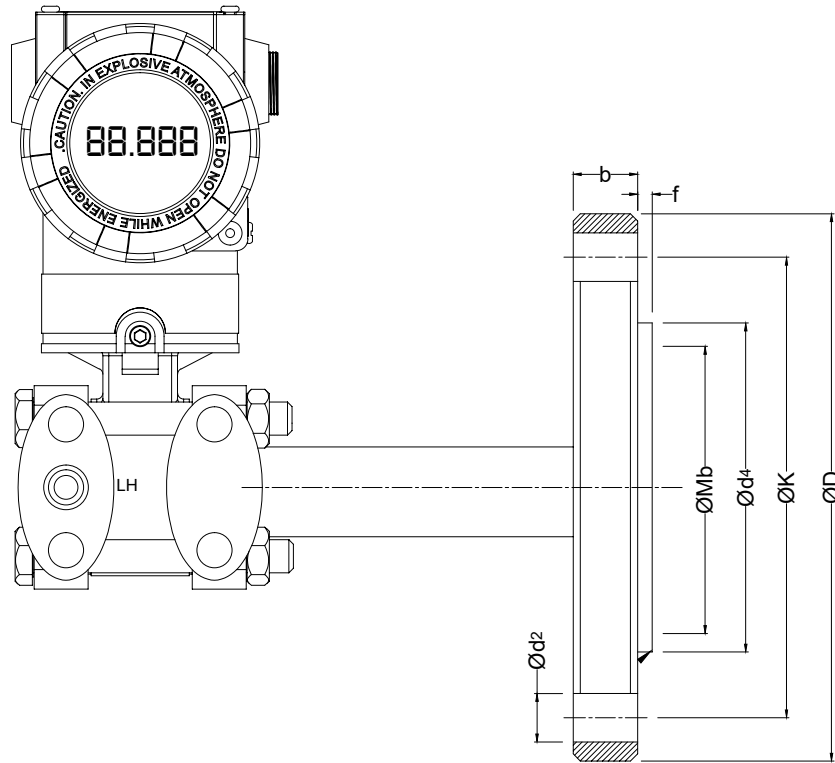


### Tek-Hydro 4500A-D-LED

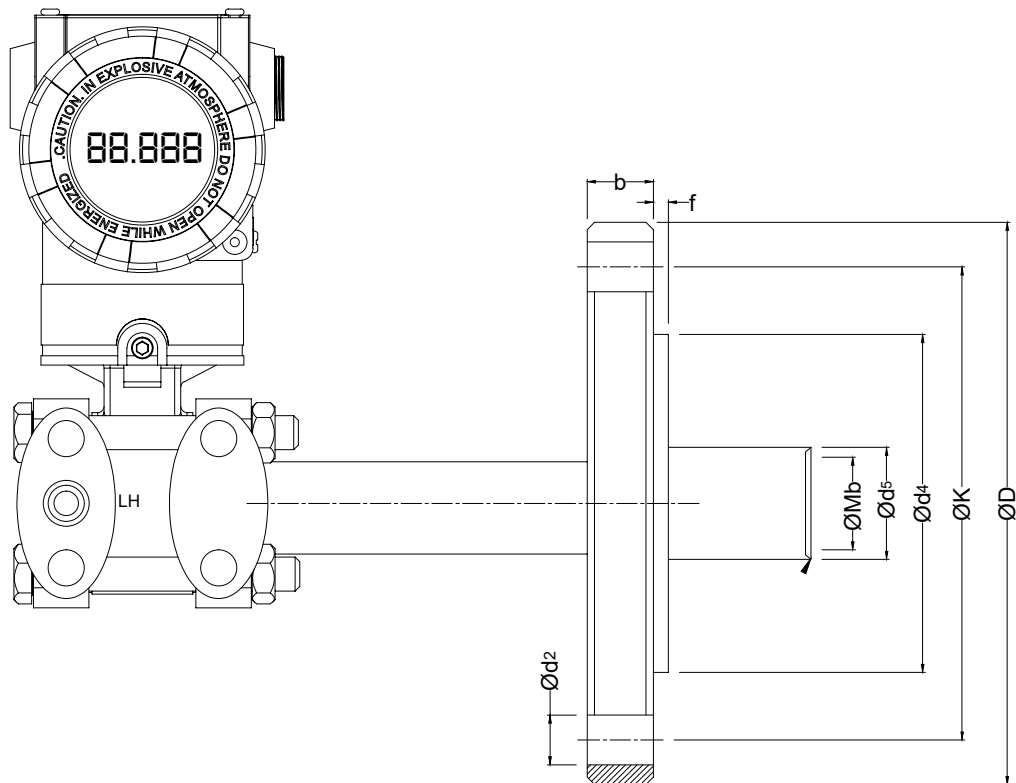


## Tek-Hydro 4500A-D-LFS

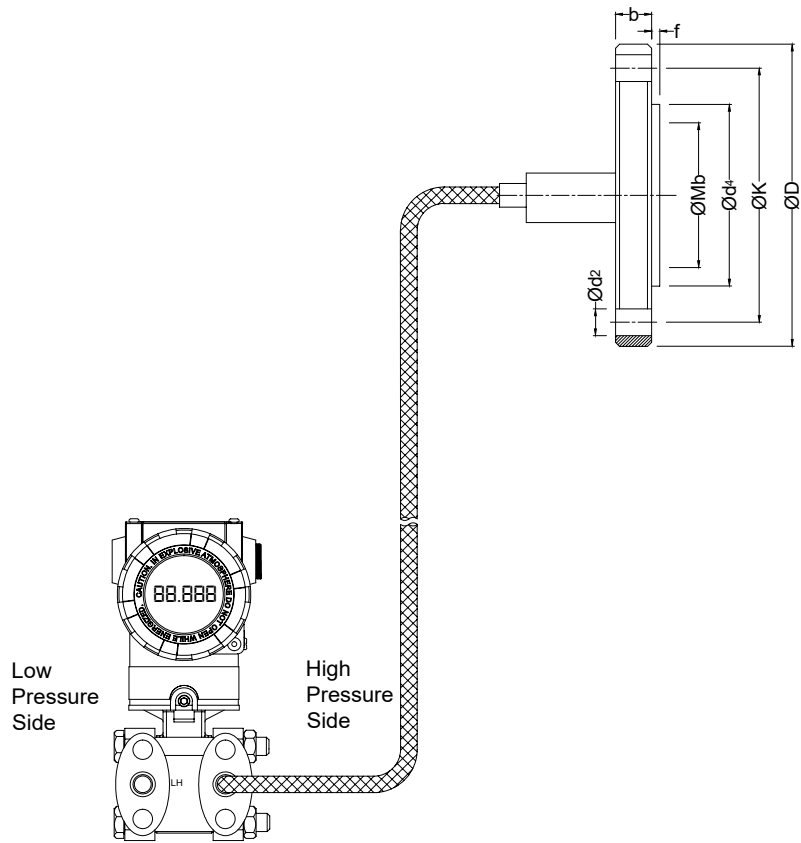


## Tek-Hydro 4500A-D-LES

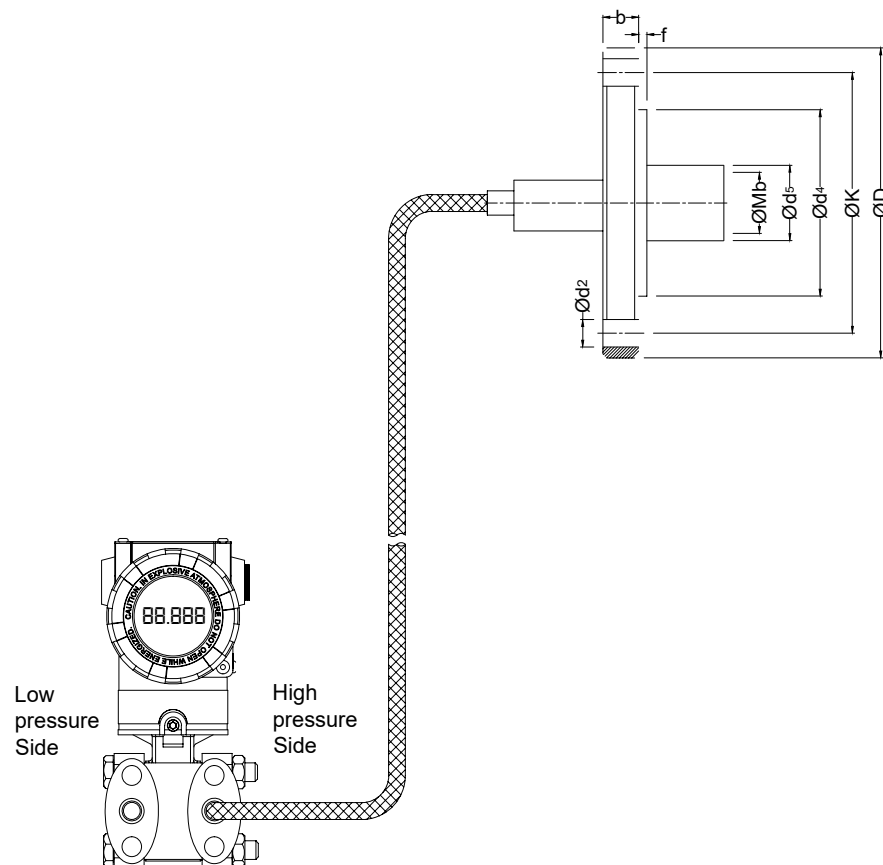

Tek-Hydro 4500A-D-LFC

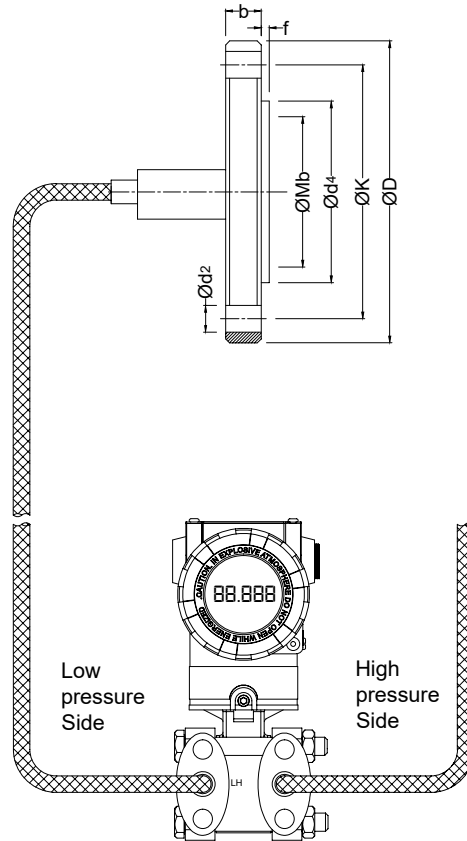

Tek-Hydro 4500A-D-LEC

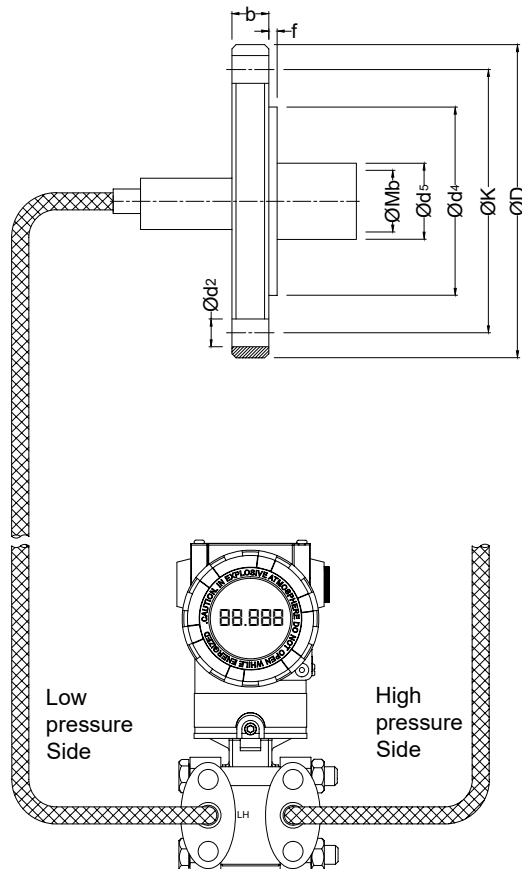

## Dimensions

### Dimension for Flush Diaphragm Seal

Size	Flange Rating	Mb	D	b	d <sup>2</sup>	k	f	d <sup>4</sup>	X
3" (80mm)	ANSI Class 150	3.5" (89mm)	7.48" (190mm)	0.94" (24 mm)	0.74" (19 mm)	6" (152.5 mm)	0.05" (1.5 mm)	5" (127 mm)	0.15" (4 mm)
3" (80mm)	ANSI Class 300		8.26" (210mm)	1.14" (29 mm)	0.86" (22 mm)	6.63" (168.5 mm)			0.31" (8 mm)
2" (50mm)	ANSI Class 150	2.4" (61mm)	5.98" (152mm)	0.74" (19mm)	0.74" (19 mm)	4.74" (120.5 mm)	0.05" (1.5 mm)	3.6" (92 mm)	0.15" (4 mm)
2" (50mm)	ANSI Class 300		6.49" (165mm)	0.86" (22mm)		5" (127 mm)			0.31" (8 mm)

### Dimension for Extended Diaphragm Seal

Size	Flange Rating	Mb	D	b	d <sup>2</sup>	k	f	d <sup>4</sup>	d <sup>5</sup>	X
3" (80 mm)	ANSI Class 150	2.99" (76 mm)	7.48" (190)	0.94" (24)	0.74" (19)	6" (152.5)	0.05" (1.5)	5" (127)	2.99" (76)	0.15" (4)
3" (80 mm)	ANSI Class 300		8.26" (210)	1.14" (29)	0.86" (22)	6.63" (168.5)				0.31" (8)
2" (50mm)	ANSI Class 150	1.88" (48)	5.98" (152)	0.74" (19)	0.74" (19)	4.74" (120.5)	0.05" (1.5)	3.6" (92)	1.88" (48)	0.15" (4)
2" (50 mm)	ANSI Class 300		6.49" (165)	0.86" (22)		5" (127)				0.31" (8)

## Specifications

### Pressure Sensor Ranges

Code	Min/Max Span	LRV/URV
4	1.5 to 150 in H <sub>2</sub> O	-150 to 150 in H <sub>2</sub> O
5	7.5 to 750 in H <sub>2</sub> O	-750 to 750 in H <sub>2</sub> O
6	1 to 100psi	-100 to 100psi
7	3 to 300psi	-300 to 300psi
8	10 to 1000psi	-1000 to 1000psi

Electrical Specification	
Power Supply	12 to 45VDC
HART loop resistance	250 to 550ohm
Output Signal	4 to 20mA DC / HART
Isolation	500 Vrms (707VDC)
Update Time	0.25 sec.
Turn on time	5 sec.


Performance Specifications	
Reference Accuracy	± 0.075% of Span
Ambient Temp. Effect	±[0.025%URL+0.125% Span]/28 °C
Stability	±0.1% URL for 12 Months
Operating Temperature	-40 °F to 185 °F(-40 °C to 85 °C)
LCD Meter Operating Temperature	-22 °F to 176 °F (-30 °C to 80 °C)
Humidity Limits	5% to 98% RH
Process Temperature Limit	-40 °F to 248 °F(-40 °C to 120 °C)

Physical Specifications	
Isolating Diaphragm	316L SST
Drain and Vent Valve	316 SST
Flange and Adapter	316 SST
O-ring	Viton, PTFE
Bolts and Bolting Flange	316 SST
Fill Fluid	Silicon 200
	Neobee
Process Connection Size	¼" – 18" NPTF
	½"-14" FNPT Connection Adapter (316 SST) for Tek-Hydro 4500A-D series w/ Single Diaphragm Seal
Electrical Connection Housing	½" - 14" NPTF Conduit/Epoxy Coated-Aluminum
	G1/2 Conduit/Epoxy Coated-Aluminum
Approvals	KOSHA Flameproof Approval: Ex d IIC T6
	KTL Intrinsic Safety Approval: Ex ia IIC
	ATEX (KEMA) Flameproof: Ex d IIC T6 or T5
	ATEX (DEKRA) Intrinsic Safety
	FM/FMC Explosion proof (for USA & Canada) Class I/II/III, Division ½, Group A-D/E-G




# Installation


## Standard Installation

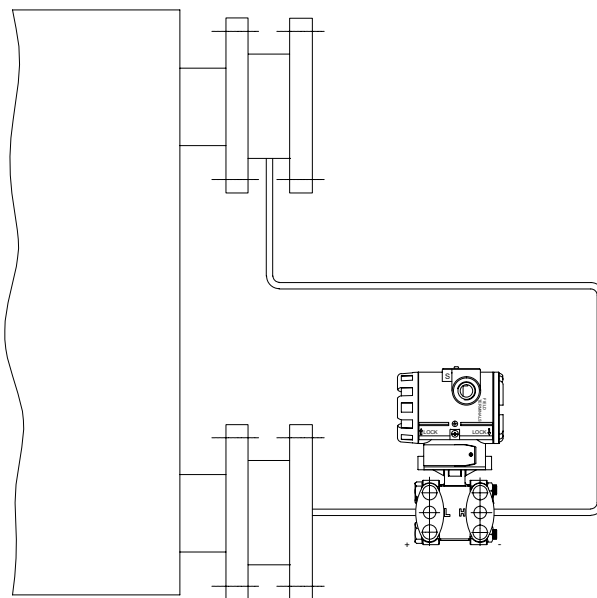


## Installation for vacuum application

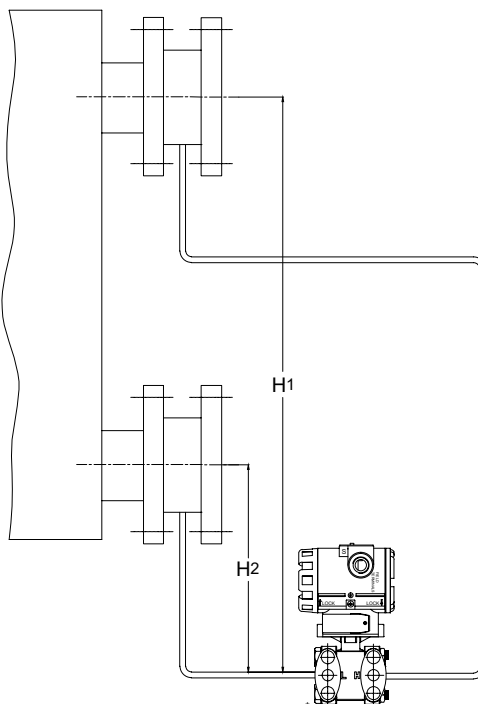

Installation of transmitter above the upper measuring point, no vacuum

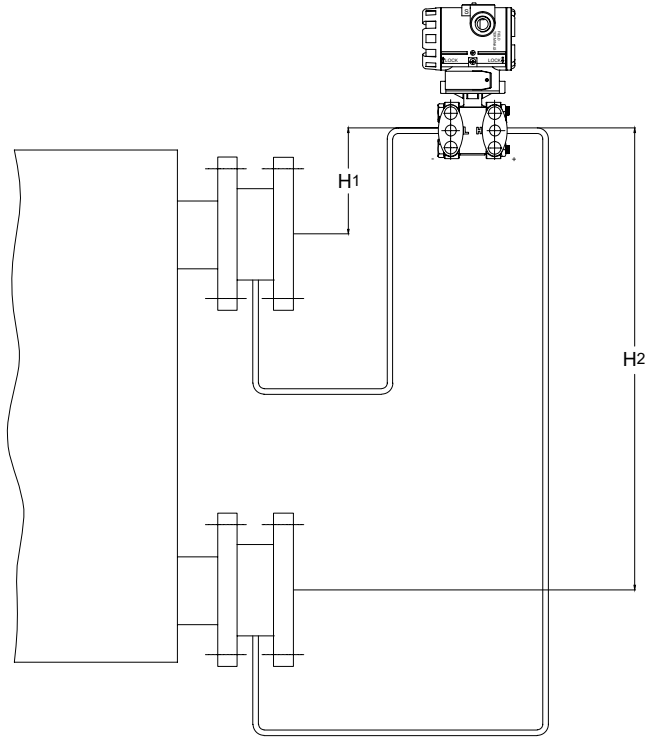

Installation of transmitter between the measuring points, no vacuum

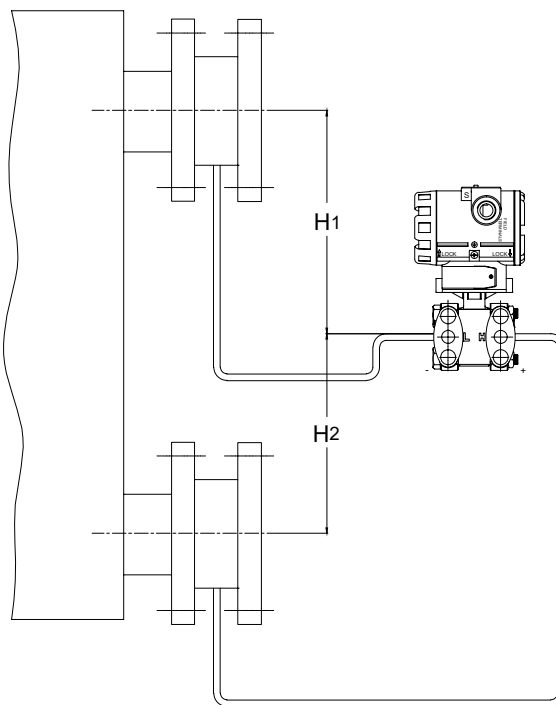

# Model Chart

EXAMPLE	Tek-Hydro 4500A-D	1	WP	X	1	LFC	S2	A1	0	S	2	X	X	#	4500A-D-1-WP-X-1-LFC-S2-A1-0-S-2-X-X
<b>Series</b>	Tek-Hydro 4500A-D														Hydrostatic Differential Pressure Level Transmitter
<b>Range</b>		1 2 3 4 5 6													0 - 24" w.c. (30:1 Turndown, Adj. Range: -24" to +24" w.c.) 0 - 160" w.c. (100:1 Turndown, Adj. Range: -160" to +160" w.c.) 0 - 1000" w.c. (100:1 Turndown, Adj. Range: -1000" to +1000" w.c.) 0 - 145psid (100:1 Turndown, Adj. Range: -72 to +145psid) 0 - 435psid (100:1 Turndown, Adj. Range: -72 to +435psid) 0 - 1450psid (100:1 Turndown, Adj. Range: -72 to +1450psid)
<b>Approval Rating</b>			FM ATEX CSA WP												FM Approval ATEX Approved CSA Class I Div I Explosion-Proof General Purpose NEMA 4X/IP66
<b>Process Connection</b>				X											Diaphragm Seal
<b>Electrical Connection</b>					1										½" NPT female
<b>Diaphragm Seal Type</b>						LEC LED LEH LEL LFC LFD LFH LFL									2 Extended Diaphragm Seals Capillary Type (Up to 5Ft) 1 Extended Diaphragm Seals Direct Mount High Side 1 Extended Diaphragm Seals Capillary Type High Side (Up to 5 Ft) 1 Extended Diaphragm Seals Capillary Type Low Side (Up to 5 Ft) 2 Flush Diaphragm Seals Capillary Type (Up to 5 Ft) 1 Flush Diaphragm Seals Direct Mount High Side 1 Flush Diaphragm Seals Capillary Type High Side (Up to 5 Ft) 1 Flush Diaphragm Seals Capillary Type Low Side (Up to 5 Ft)
<b>Mounting Flange</b>							S2 S3								2" (50 mm) 316L Stainless Steel 3" (80 mm) 316L Stainless Steel
<b>Mounting Flange Rating</b>								A1 A2 A3 D1 D2 J1 J2							ANSI Class 150 ANSI Class 300 ANSI Class 600 DIN PN 10/16 DIN PN 25/40 JIS 10k JIS 20k
<b>Extension Length</b>									0 5 10 15						No Extension Standard Option for Flush Mount 2" (50 mm) 4" (100 mm) 6" (150 mm)
<b>Wetted Parts</b>										H P S T					Hastelloy C-276 Diaphragm PTFE and 316L Stainless Steel Diaphragm 316L Stainless Steel Diaphragm Tantallum Diaphragm
<b>Fill Fluid</b>											2				D.C. Silicon 200 (-40-400° F)
<b>Capillary Length High Side</b>												X			Capillary length 0-40' (whole numbers only) (over 5ft)
<b>Capillary Length Low Side</b>													X		Capillary length 0-40' (whole numbers only) (over 5ft)
<b>Options</b>															CC Custom Calibration with 5 point Calibration Certificate FC Factory Configuration, No Certificate BA Stainless Steel Bracket (Flat Type) with SS Bolts BF Stainless Steel Bracket (Flat Type) with SS Bolts TAG Stainless Steel Hang Tag

# Customer Service & Support



TEKMATION LLC reserves the right to change the designs and/or materials of its products without notice. The contents of this publication are the property of TEKMATON and cannot be reproduced by any other party without written permission. All rights reserved. Copyright © 2021 TEKMATON LLC  
TEKMATION LLC  
DOC # TEKM/TPS/CAT/240520/4500A-D/00.2



[www.tek-trol.com](http://www.tek-trol.com)

## **Tek-Trol LLC**

796 Tek Drive Crystal Lake,  
IL 60014, USA



+1 847-857-6076



[tektrol@tek-trol.com](mailto:tektrol@tek-trol.com)



[www.tek-trol.com](http://www.tek-trol.com)

Tek-Trol is a fully owned subsidiary of TEKMATON LLC. We offer our customers a comprehensive range of products and solutions for process, power and oil & gas industries. Tek-Trol provides process measurement and control products for Flow, Level, Temperature & Pressure measurement, Control valves & Analyzer systems. We are present in 15 locations globally and are known for our knowledge, innovative solutions, reliable products and global presence.