




ACCESSORIES



Technology Solutions

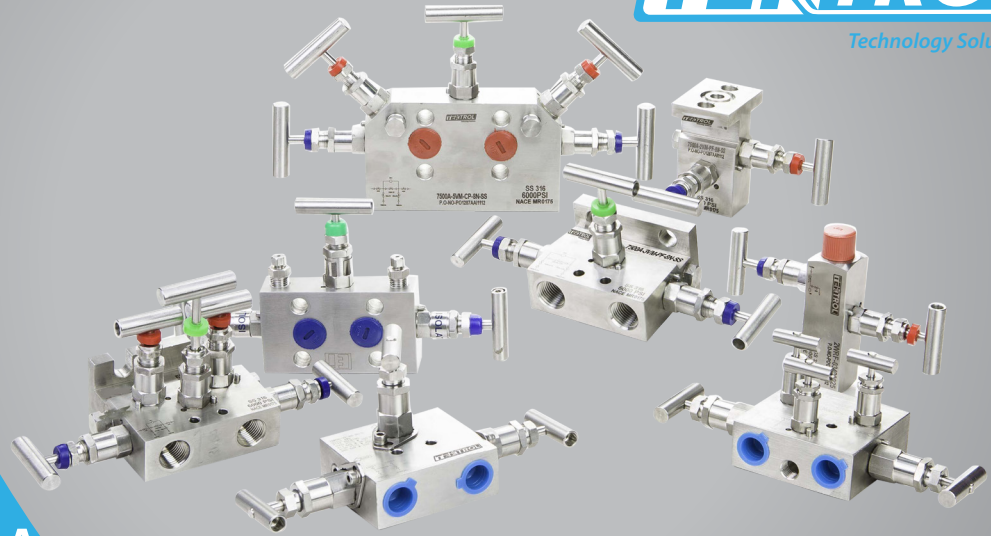

Manifolds

Tek-Manifold 7500A

1 FEATURES

- Available with flanged or threaded process connections
- Max. working pressure of 6000 psi
- Hydrostatic tested to 9000 psi
- All the valves are 100% factory tested
- All 316SS and PTFE wetted materials

2 SPECIFICATION

End connections	Flange x Flange, Flange x 1/2" FNPT, Male x Female 1/2" NPT
Working pressure	6000 psi (413 Bar)
Temperature rating	PTFE, 450 °F (232 °C)
Stem packing	PTFE
Lubricant	Moly disulphide
Materials of construction	S5316

3 APPLICATIONS

- Oil and Gas Industry
- Chemical Industry
- Power Plants
- Seawater Desalination Plants
- Steel Mills
- Cement Plants
- Water Incineration Plants

CONTACT US

📍 796 Tek Drive, Crystal Lake, IL 60014 USA

☎ +1 847 857 6076

✉ Email: tektrol@tek-trol.com

🌐 www.tek-trol.com