



Technology Solutions

# TEK-LCD 7804A

## NEMA 4X Modbus® Scanner Indicator



INDICATOR/  
CONTROLLER

[www.tek-trol.com](http://www.tek-trol.com)

Flow | Level | Temperature | Pressure | Valves | Analyzers | Accessories | TekValSys

## Introduction


### NEMA 4X Modbus® Scanner Indicator

The Tek-LCD 7804A is a plastic, field-mounted, RS485 serial input Modbus® RTU scanner capable of scanning up to 16 Modbus variables and displaying them on an easy-to-read, dual-line, LCD display. It can be programmed as a Modbus RTU master, slave, or snoopers. The Tek-LCD 7804A is available in two upper display line configurations: 5-digit decimal display and feet & inches display with bar graph. The lower line is the same for both versions and consists of seven alphanumeric characters. Two features that really make the Tek-LCD 7804A stand out are its wide viewing angle display and SafeTouch® through-window buttons. These buttons allow the Tek-LCD 7804A to be programmed and operated through the cover window, thus eliminating the need to remove the cover in dirty or wet environments.

## Features

- Modbus Master, Slave, or Snooper Mode
- Scan up to 16 Modbus Process Variables
- 5-Digit Decimal or Feet & Inches Level Display
- On-Board Three-Wire RS-485 with Modbus
- Independent Scaling, Tag, and Unit for Each PV
- 7 Alphanumeric Character 0.4" (0.03 ft)
- Injection-Molded, IP65, NEMA 4X Enclosure
- SafeTouch Through-Window Button Programming
- Isolated 4-20 mA Output Option
- Pulse Input for Rate, Total, and Grand Total
- 13-Digit Totalizer with Total Overflow Feature
- Backlight Standard on All Models
- Automatic Rate, Total, and Grand Total Unit Conversions
- Operates from -40°C to 75°C (-40°F to 167°F)
- Data Logging Functions and Modbus Accessible Data
- Two Isolated Pulse Outputs Standard, Up to 5 kHz

## Dimensional Drawings

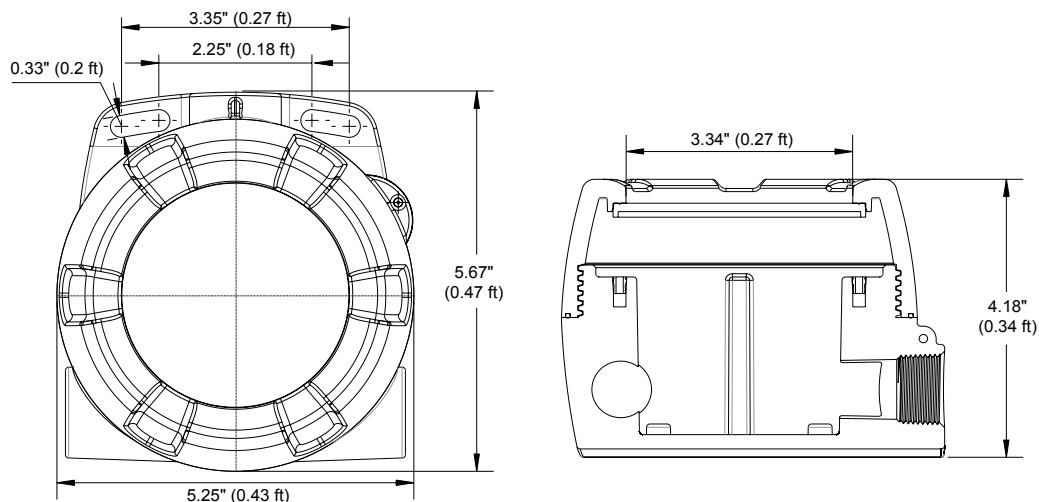

# Specifications

## General

<b>Decimal Display</b>	Top Display: Five Digits (0 to 99999), 0.7" (0.05 ft) high, 7-segment, automatic lead zero blanking. Bottom Display: Seven Characters, 0.4" (0.03 ft) high, 14-segment, automatic lead zero blanking. Symbols: Total, grand total, high alarm, low alarm, SafeTouch button sleep mode/disable, password lock.
<b>Feet &amp; Inches Display</b>	Top Display: 0.60" (0.05 ft) high, 0 to 399 FT, 11 and 15/16 IN, 7-segment, programmable 1/16 or 1/8 fraction display. Bottom Display: Seven Characters, 0.4" (0.03 ft) high, 14-segment, 7-digits. Tank Level Indicator: 20-segments, F (Full) and E (Empty). Alarm Indication: High and low alarm Backlight: White
<b>Display Assignment</b>	Top and Bottom Display*: Process Variables (PV); Alternating PV and Units, Tag and PV, or Tag, PV, and Units; Pulse Input Rate, Total, or Grand Total with Alternating Tag. Bottom Display: All Top Display Options or Off Units and tag independent for each PV, pulse input rate, total, and grand total. *Note: On feet and inches display models, top display used only for level Modbus process variables or math channels.
<b>Backlight</b>	White LED, 10 sec auto-off when battery powered. Backlight deactivated below temperature $\approx -20^{\circ}\text{C}$ ( $-4^{\circ}\text{F}$ )
<b>Alarm Indication</b>	Flashing display plus HI/LO (alarm) or SET indicators.
<b>Scan and Update Rate</b>	Ambient $> -20^{\circ}\text{C}$ ( $-4^{\circ}\text{F}$ ): Modbus PV scan rate programmable from 2 to 99 seconds per PV. Tag and units programmable for 1 to 5 second alternation. Pulse input variables update 1/second. Rate update is dependent on gate settings. Ambient $< -20^{\circ}\text{C}$ ( $-4^{\circ}\text{F}$ ): All Modbus scan, alternating units and tags, and pulse input variables update/10 seconds minimum.
<b>Underrange</b>	Upper Display: Decimal display flashes -9999. Level display flashes to 399 FT, 11 and 15/16 IN Lower Display: Flashes -999999
<b>Programming Method</b>	Four SafeTouch through-window buttons when cover is installed. Four internal push buttons when cover is removed.
<b>Recalibration</b>	Calibrated at the factory to read frequency in Hz. No recalibration required.
<b>Password Menu Options</b>	Three programmable password selections can be used for the following: restrict modification of settings, prevent resetting the total or grand total without the password, or permanently lock out the ability to change or reset the grand total or any grand total related settings(making a non-resettable grand total). Pass: Restricts modifications of programmed settings to require re-entering the password to make changes. Pass T: Restricts the reset of total to require re-entering the password. Disables the manual mode reset contact. Pass GT: Restricts the reset of grand total to require re-entering the password. May enable a non-resettable grand total and permanent lockout of grand total-related settings with a specific password.
<b>Input Power</b>	9-30 VDC, 38 mA max. 2.2 W
<b>Data Logging</b>	Up to 512 records, recorded 4/day at specific times or at defined time intervals. Record contains first eight enabled Modbus PVs; C1-4 if enabled; date; time; pulse rate, total, and grand total with units; and log number.
<b>Isolation: All Models</b>	500 V opto-isolated pulse input-to-power/OC output with isolated input enabled, 500 V input/power-to-RS-485 serial communications. AXA Models: 500 V input/power-to-analog output.
<b>Environmental</b>	Operating temperature range: $-40$ to $75^{\circ}\text{C}$ ( $-40^{\circ}\text{F}$ to $167^{\circ}\text{F}$ ); Storage temperature range: $-40$ to $75^{\circ}\text{C}$ ( $-40^{\circ}\text{F}$ to $167^{\circ}\text{F}$ ); Backlight deactivated below temperatures $\approx -20^{\circ}\text{C}$ ( $-4^{\circ}\text{F}$ ); Relative humidity: 0 to 90% non-condensing
<b>Non-Volatile Memory</b>	All programmed settings and total reading are stored in non-volatile memory for a minimum of ten years if power is lost.
<b>Connections</b>	Screw terminals accept 12 to 22 AWG wire
<b>Enclosure</b>	NEMA 4X, IP65 plastic field enclosure. Color: blue. Material: Polycarbonate with UV Stabilizer. Three $\frac{3}{4}$ " NPT threaded conduit openings. Two $\frac{3}{4}$ " NPT plastic conduit plugs, with 1.29" wrenching flats and a screwdriver slot, are included.
<b>Mounting</b>	May be mounted directly to conduit. Two slotted flanges for wall mounting or NPS $1\frac{1}{2}$ " to $2\frac{1}{2}$ " or DN 0.13 ft to 0.21 ft pipe mounting.
<b>Display Orientation</b>	Display may be mounted at $90^{\circ}$ increments up to $270^{\circ}$ from default orientation.
<b>Overall Dimensions</b>	5.67" x 5.25" x 4.18" (0.47 ft x 0.43 ft x 0.34 ft) (W x H x D)
<b>Weight</b>	1.65 lbs (26.4 oz, .75 kg)
<b>Warranty</b>	3 years parts and labor

## Input

<b>Pulse/Transistor/Contact Closure Input</b>	Field selectable; Sourcing or sinking pulse or square wave; 0-5 V, 0-12 V, or 0-24 V; TTL; NPN or PNP transistor; Open collector 100 kΩ pull-up to 3 V; Switch contact 100 kΩ pull-up to 3 V; PNP transistor 100 kΩ pull-down to ground (COM); Active input 100 kΩ to battery level, 10 kΩ to power Maximum Frequency: 64 kHz; Minimum Pulse Width: 5 μs;  Threshold Setting    Low (V)    High (V) Normal                    1.2        2.0 Low                        0.2        1.2
<b>Opto-Isolated Input</b>	Sourcing pulse or square wave 0-5 V, 0-12 V, or 0-24 V; Logic High: 2-24 V, Logic Low: < 1 V; Maximum Frequency: 20 kHz; Minimum Pulse Width: 20 μs; Input Current: 1 mA @ 5 V, 2.5 mA @ 12 V, 5 mA @ 24 V
<b>Low Voltage Mag Pickup Input</b>	Sensitivity: 20 mVp-p to 24 Vp-p; Maximum Frequency: 6 kHz
<b>Minimum Input Frequency</b>	0.0001 Hz. Minimum frequency is dependent on high gate setting (rate display).
<b>Input Impedance</b>	Pulse input: Greater than 75 kΩ @ 1 kHz. Open collector/switch input: 100 kΩ pull-up to 3 V.
<b>Accuracy</b>	±0.03% of calibrated span ±1 count
<b>Pulse Input Recalibration</b>	All ranges are calibrated at the factory to read frequency in Hz. No recalibration required.
<b>Temperature Drift</b>	Rate display is not affected by changes in temperature.
<b>Low-Flow Cutoff</b>	0-99,999 (0 disables cutoff function)
<b>Decimal Point</b>	Up to four decimal places or none: 4.4444, 33.333, 222.22, 1111.1, or 00000
<b>Calibration Calibration</b>	May be calibrated using K-Factor, scale without signal source, or by applying an external calibration signal.
<b>K-Factor</b>	Field programmable K-Factor converts input pulses to rate in engineering units. May be programmed from 0.000001 to 9,999,999 pulses/unit.
<b>Calibration Range</b>	Input 1 signal must be ≥ 1 Hz; input 2 signal may be set anywhere above input 1 setting. Minimum input span is 1 Hz. An Error message will appear if the input 1 and input 2 signals are too close together.
<b>Input Contact Debounce Filter</b>	Programmable contact debounce filter. Input signal frequency speed selections of Hi (no filter), Med (250 Hz max input, 7 ft/s pulse width), and Low (100 Hz max input, 16 ft/s minimum pulse width).
<b>Time Base</b>	Second, minute, hour, or day
<b>Time Base</b>	Low gate: 1-99 seconds; High gate: 2-9,999 seconds

## Popular Models

Model Number	Description
7804A-AX0	NEMA 4X Modbus Scanner indicator

## Accessories

Model Number	Description
7800A-6846	Steel Pipe Mounting Kit
7800A-6846SS	Stainless Steel Pipe Mounting Kit
7800A-PLUG75P	¾" NPT Plastic Conduit Plug

# Customer Service and Support



TEKMATION LLC reserves the right to change the designs and/or materials of its products without notice. The contents of this publication are the property of TEKMATON and cannot be reproduced by any other party without written permission. All rights reserved. Copyright © 2016 TEKMATON LLC  
DOC # TEK/TIPS/CAT/7894A/2405/20/01  
TEKMATION LLC



[www.tek-trol.com](http://www.tek-trol.com)

Tek-Trol is a fully owned subsidiary of TEKMATON LLC. We offer our customers a comprehensive range of products and solutions for process, power, and oil and gas industries. Tek-Trol provides process measurement and control products for Flow, Level, Temperature and Pressure Measurement, Control Valves and Analyzer systems. We are present in 15 locations globally and are known for our knowledge, innovative solutions, reliable products, and global presence.

## **Tek-Trol LLC**

796 Tek Drive Crystal Lake, IL 60014 USA  
Tel: +1 847 857 6076 Fax: +1 847 655 6147  
Email: [tektrol@tek-trol.com](mailto:tektrol@tek-trol.com)  
[www.tek-trol.com](http://www.tek-trol.com)