



Technology Solutions

TEK-BAR 3120A

Explosion-Proof Gauge Pressure Transmitter



PRESSURE



www.tek-trol.com


Flow | Level | Temperature | Pressure | Valves | Analyzers | Accessories | TekValSys

Introduction

The Tek-Bar 3120A series of smart transmitters have excellent stability, high accuracy, and include features that facilitate easy installation, start up, and minimum maintenance thereby lowering process downtime and overall cost of ownership in the long run. These transmitters are equipped with an automatic temperature compensation function integrated into its advanced signal processing circuitry to ensure high reliability and performance corresponding to change of ambient temperature.

Measuring Principle


The Tek-bar 3120A uses piezo-electric pressure transducer. It consists of quartz crystal, which is made from silicone and oxygen arranged in crystalline structure (SiO_2). That crystal is inserted between a solid base and the pressure sensing diaphragm. If pressure is applied, the same force will fall on the pressure sensing diaphragm that pressure to stretch or bend the crystal and an electric potential is generated. The voltage produced will be proportional to the magnitude of the applied pressure.

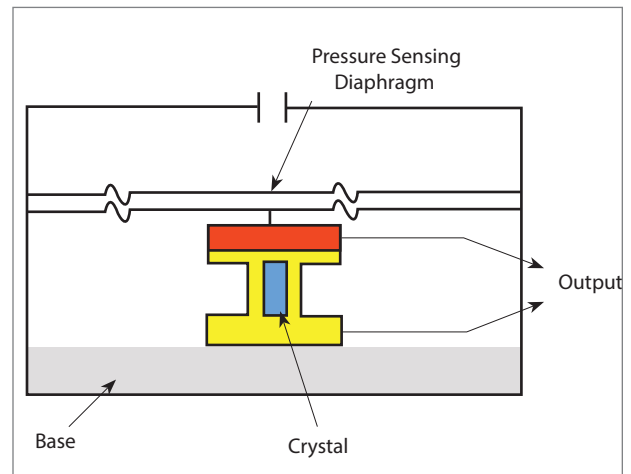

Operation

Electronic Module:

The Electronics module consists of a circuit board sealed in an enclosure. There is a MCU module, a power module, an analog module, a LCD module, and a terminal module in a transmitter. The MCU module acquires the digital value from the analog module and apply correction coefficients selected from EEPROM. The output section of the power module converts the digital signal to a 4 to 20 mA output. The MCU module communicates with the HART-based Configurator. The Power module have a DC-to-DC Power conversion circuit and an input/output isolation circuit. An optional LCD module plugs into the MCU module and displays the digital output in user-configured unit.

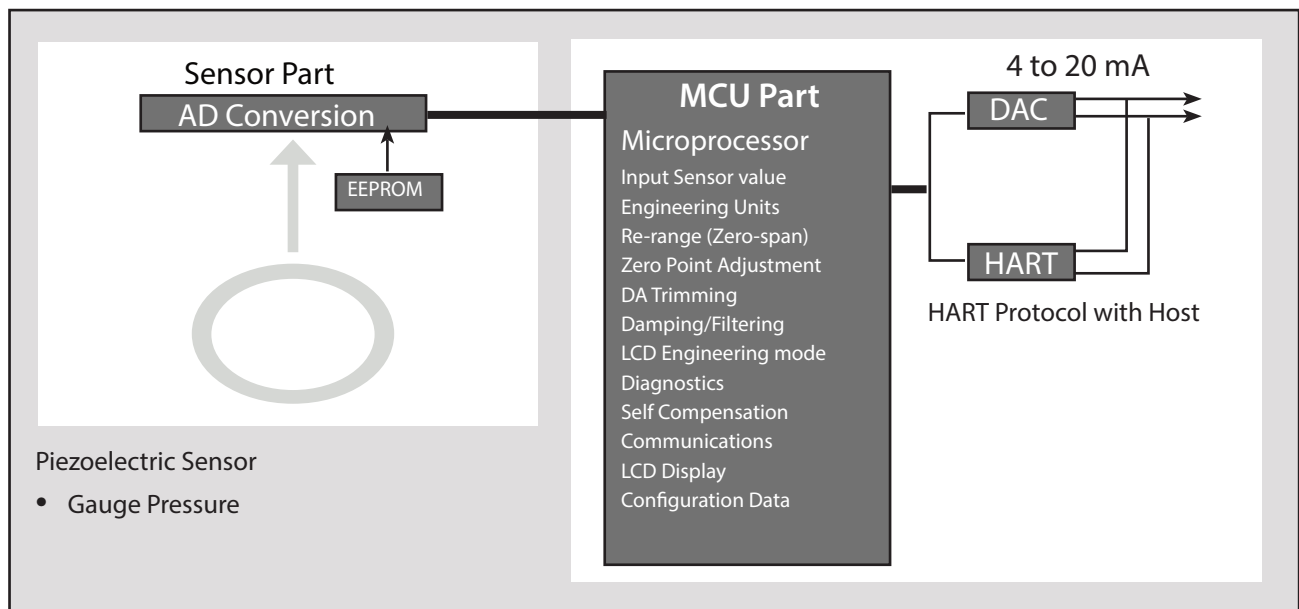

Sensor Input:

The model Tek-Bar 3120A is available in piezo-electric sensor. The sensor module converts the electric signal to the digital value. The MCU module calculates the process pressure based on the digital value.

The sensor modules include the following features :


- $\pm 0.075\%$ accuracy, the most accurate sensor in the industry
- The software of the transmitter compensates for the thermal effects, improving performance
- Precise Input Compensation during operation is achieved with temperature and pressure correction coefficients that are characterized over the range the transmitter and stored in the sensor module EEPROM memory
- EEPROM stores sensor information and correction coefficients separately from MCU module, allowing for easy repair, reconfiguration and replacement

Benefits

- Operator can calibrate device using zero/span button, no handheld calibrator required. Optionally handheld device communicator can be used to calibrate devices
- Digital communication HART protocol, latest version
- Fail-safe mode process function for detecting any abnormal condition occurring
- Standard accuracy $\pm 0.075\%$, High enhanced Accuracy $\pm 0.04\%$ available
- Automatic ambient temperature compensation improve performance of device
- It can be used as flow meter and should be installed vertically without using additional flanges
- Various Output: 4-20 mA, digital signals
- The mounting bracket can be rotated up to 360° and LCD display up to 270°
- EEPROM write protection

Applications

- Water and waste water
- Oil and Gas
- Pulp and paper

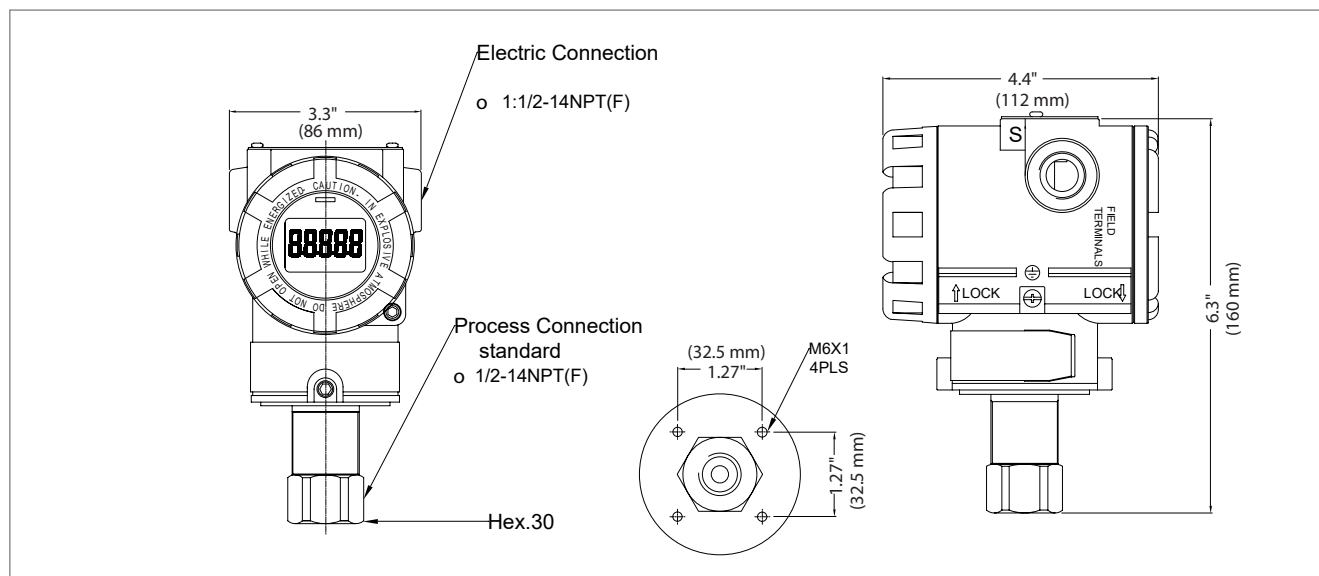

Specifications

Technical Specification

Parameter	Description
Accuracy	0.075% of Span standard, High enhanced accuracy $\pm 0.04\%$ of span available in conformance to ± 3 Sigma
Rangeability	100:1
Stability	5 years standard, Optional 3 year $\pm 0.10\%$ of URL available
Maximum Working Pressure Limit	2000 psi std, High Pressure 4500 psig available
Hydrostatic Test Pressure	1.5 times MWP
Burst Pressure	10000 psig (68.9MPa)
Process Temperature Limits	-40 °F to +284 °F
Ambient Temperature Effect	$\pm [0.019\% \text{URL} + 0.125\% \text{Span}] / 82.4 \text{ °F}$
Ambient Temperature	-40 °F to 185 °F
Humidity Limits	5% to 100% RH
Power Supply Effects	$\pm 0.005\%$ of Span per Volt
Display (optional)	5 digit LCD display
Failure Mode	Fail High: Current $\geq 21.1 \text{ mA}$ Fail Low: Current $\leq 3.78 \text{ mA}$
Volumetric Displacement	$< 0.005 \text{ cu in}$
Vibration Effect	$\pm 0.1\%$ of URL per IEC60770-1 site conditions
EMC Immunity	EN50081-2, EN50082-2, IEC801-3

Electrical Specification

Parameter	Description
Power Supply	Voltage Range: 12 to 45 VDC
	Voltage Rating: 24 VDC \pm 30%
HART loop resistance	250 to 550 ohm
Output Signal	4 mA to 20 mA with HART®
Isolation	500 Vrms (707 VDC)

Physical Specifications

Parameter	Description
Isolating Diaphragm	316LSST
Wetted Materials	316SST,Tantalum,HAST-C
Fill Fluid	Silicone oil or Inert fill
Paint	Epoxy-Polyester or Polyuret
Mounting Bracket	304 SST with U-bolt (304SST) for 2-inch pipe
Nameplate	304 SST
Electronic Housing	Aluminum (Option:316LSST)
Process Connection Size	½" NPT Female
Electrical Connections	½" NPT Female, M-20 with (ATEX Only)
Approvals	FM Approval (Class I Div I), ATEX Exd/Exia, Exd IIC T4....TP6
Weight	3.74 lb (Standard - excluding options)
	6.23 lb (SST Housing- excluding options)


Tek-Bar 3120A–G Pressure Sensor Range

Range code	Range		Calibrated Span (Min. to Max.)	
	kPa	psig	kPa	psig
3	-100 to 150	-14.5 to 21	1.5 to 150	0.22 to 21
4	-100 to 1,500	-14.5 to 217	15 to 1,500	2 to 217
5	0 to 5,000	0 to 725	50 to 5,000	7.25 to 725
6	0 to 25,000	0 to 3600	250 to 25,000	36 to 3600
7	0 to 60,000	0 to 8500	600 to 60,000	87 to 8700

Installation

Mounting in liquid applications

- Place taps to the side of the line
- Mount beside or below the taps
- Mount the transmitter so the drain/vent valves are oriented upward

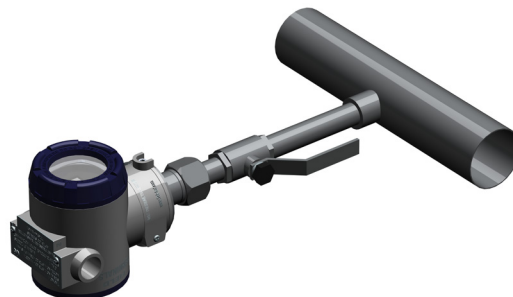

Mounting in gas applications

- Place taps in the top or side of the line
- Mount beside or above the taps



Mounting in steam applications

- Place taps to the side of the line
- Mount beside or below the taps
- Fill impulse lines with water



Model Chart

Example	Tek-Bar 3120A	3	FM	1	1	LCD	Tek-Bar 3120A-G-3-FM-1-1-LCD
Series	Tek-Bar 3120A						Explosion-Proof Gauge Pressure Transmitter
Range Options		G-3 G-4 G-5 G-6 G-7 A-4 A-5 A-6 x					-14.5-21 psig (factory set 0 to 21 psig) / A : NA -14.5-217 psig (factory set 0 to 217 psig) / A : 0-36 psig 0-725 psig / A : 0-217 psig 0-3600 psig / A : 0-360 psig 0-8500 psig / A : NA 0.36 to 36 psia 2.17 to 217 psia 3.62 to 360 psia Special
Approval Rating			FM ATEX IEC				FM Approval (Class I Div I) ATEX Exd/Exia Exd IIC T4....TP6
Process Connection				1- SS 1-SH 1- ST 1- HH X			½" NPT Female / 316SST / 316L SST ½" NPT Female / 316SST / HAST-C (C.F.) ½" NPT Female / 316SST / Tantalum (C.F.) ½" NPT Female / HAST-C / HAST-C (C.F.) Diaphragm Seal (C.F.)
Electrical Connection					1 2		½" NPT Female M-20 with ATEX Only
Options						LCD CC FC BA TAG EA O BF 2BB O2 LP LV B SSH MTC HT MTR	5 Digit LCD (Local Indication Only) Custom Calibration with 5 Point Calibration Certificate Factory Conguration, No Certification Stainless Steel Bracket (Angle Type) with SST Bolts Stainless Steel Hang Tag 0.04% 1/4" to 1/2" Adapter Stainless Steel Bracket (Angle Type) with SST Bolts Manifold, ½" FNPT X ½" MNPT, 316SS body, 6000psig/10K, DBB O2 Cleaning (C.F.) Lightning Protection (Internal Type) 12 VDC, Low Volt, 4-Wire, 1-5VDC Output, No HART Blind Unit (C.F.) 316 Stainless Steel Housing Material Test Certificate 2.1 (C.F.) Hydro Test Material Test Report 3.1

Popular Models

Model Number	Description
3120A-G-3-FM-1-1-LCD	Explosion-proof GP Pressure Transmitter, -14.5 to 21 psig, LCD
3120A-G-4-FM-1-1-LCD	Explosion-proof GP Pressure Transmitter, -14.5 to 217 psig, LCD
3120A-G-5-FM-1-1-LCD	Explosion-proof GP Pressure Transmitter, 0-725 psig, LCD
3120A-G-6-FM-1-1-LCD	Explosion-proof GP Pressure Transmitter, 0-3600 psig, LCD
3120A-G-7-FM-1-1-LCD	Explosion-proof GP Pressure Transmitter, 0-8500 psig, LCD

Customer Service & Support




TEK-TROL LLC reserves the right to change the designs and/or materials of its products without notice. The contents of this publication are the property of TEK-TROL LLC and cannot be reproduced by any other party without written permission. All rights reserved. Copyright © 2025 TEK-TROL LLC
DOC # TEK/TIPS/CAT/250128/3120A/01.6




www.tek-trol.com

Tek-Trol LLC

796 Tek Drive Crystal Lake,
IL 60014, USA

 +1 847-857-6076

 tekrol@tek-trol.com

 www.tek-trol.com

Tek-Trol is a fully owned subsidiary of TEKMATON LLC. We offer our customers a comprehensive range of products and solutions for process, power and oil & gas industries. Tek-Trol provides process measurement and control products for Flow, Level, Temperature & Pressure measurement, Control valves & Analyzer systems. We are present in 15 locations globally and are known for our knowledge, innovative solutions, reliable products and global presence.